



VERRICELLI DA RECUPERO – RECOVERY WINCHES

IDRAULICI SERIE EPICICLOIDALI – HYDRAULIC PLANETARY SERIES



Verricelli idraulici da recupero
epicicloidali


Planetary hydraulic recovery
winches

In conformità EN 2006 42 CE – EN 14492-2
According to EN 2006 42 CE – EN 14492-2

Modelli Models	CE EN 14492-1	Tiro 1° strato First line pull	Ø Fune Ø Rope	Fune consigliata Suggested rope	Max fune Max rope	Press. max Max pressure	Portata max Max oil flow	Velocità max Max speed	Peso Weight
		kg	mm	m	m	bar	l/min	m/min	kg
FIR 3.6 C PB	X	3600	10	25	33	160	60	28	46
FIR 3.6 L PB	X			30	43				
FIR 4.5 PB	X	4500	11	29	40	150	60	22	48
FIR 5.2 PB	X	5200	11	30	54	130	60	16	52
FIR 6.2 PB	X	6200	12	30	39	155	60	18	58
FIR 6.7 PB	X	6700	12	30	39	165	60	18	58
FIR 10.0 PB	X	10000	14	67	91	190	75	18	190
FIR 12.2 PB	X	12200	16	47	70	175	75	15	190
FIR 15.0 PB		15000	18	35	50	175	75	15	190
FIR 20.0 PB	X	20000	20	40	60	180	80	9	405
FIR 25.0 PB		25000	24	35	47	185	80	7,5	405

VERSIONI PB: MOTORE EPICICLOIDALE CON FRENO IDRAULICO
PB VERSION: PLANETARY GEAR WITH PRESSURE RELEASE BRAKE

Modelli Models	A	B	C	D	E	F
	mm	mm	mm	mm	mm	mm
FIR 3.6 C PB	251	200		102	628	355
FIR 3.6 L PB		252			680	
FIR 4.5 PB	251	252		102	699	355
FIR 5.2 PB	270	252		102	700	361
FIR 6.2 PB	270	252		108	715	361
FIR 6.7 PB	270	252		108	715	361
FIR 10.0 PB	355	335		127	927	550
FIR 12.2 PB	355	335		146	934	550
FIR 15.0 PB	355	335		127	934	550
FIR 20.0 PB	542	350		180	1249	648
FIR 25.0 PB	542	350		180	1199	650

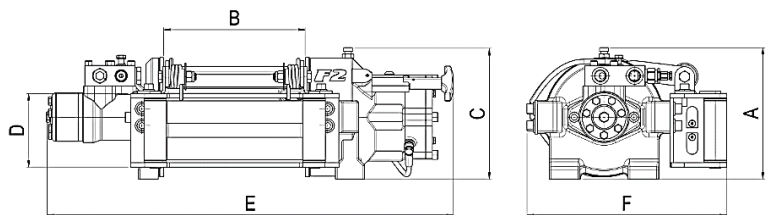

I dati possono essere variati senza preavviso – Technical data can be revised without prior notice